

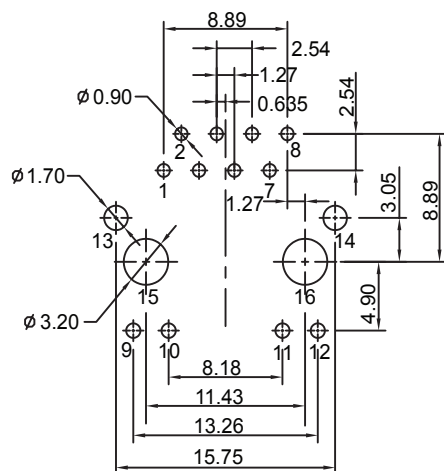
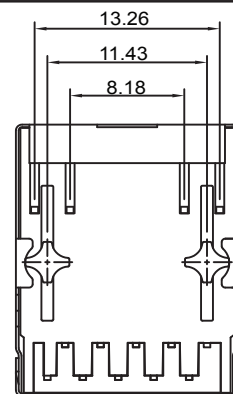
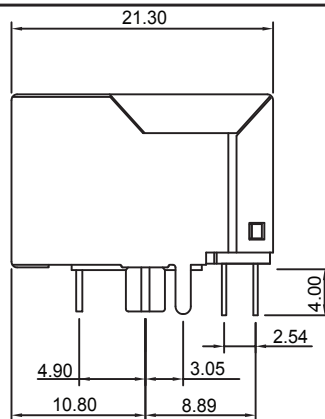


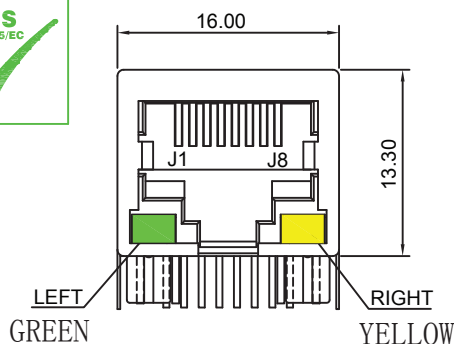

SUGGESTED PCB LAYOUT (TOP VIEW)

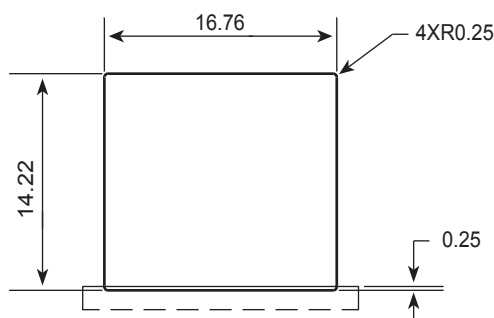

TOP PCB TO BOTTOM OF OPENING

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

Insertion Loss: 1-100MHz -1.0dB MAX

Return Loss: 1-30MHz -16.0dB MIN
30-60MHz -14.0dB MIN
60-80MHz -10.0dB MIN

Cross Talk: 1-30MHz -40.0dB MIN
30-60MHz -35.0dB MIN
60-80MHz -30.0dB MIN

CMR: 1-100MHz -35.0dB MIN

Hi-Pot: 1500v AC 6S 1mA

Turn Ratio: 1CT:1CT+/-3%



OCL:350uH MIN @ 100KHZ 100mV 8mA DC

Contacts: 0.35mm thick phos bronze plated with 6u' gold in contact are

Housing Material: PBT Black

Operating temperature range: -40 °C- +85 °C

PC BOARD CONNECTIONS

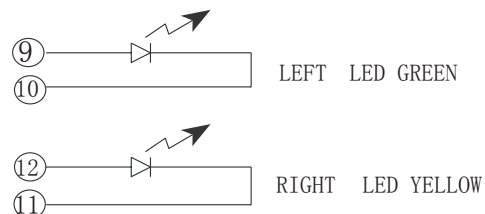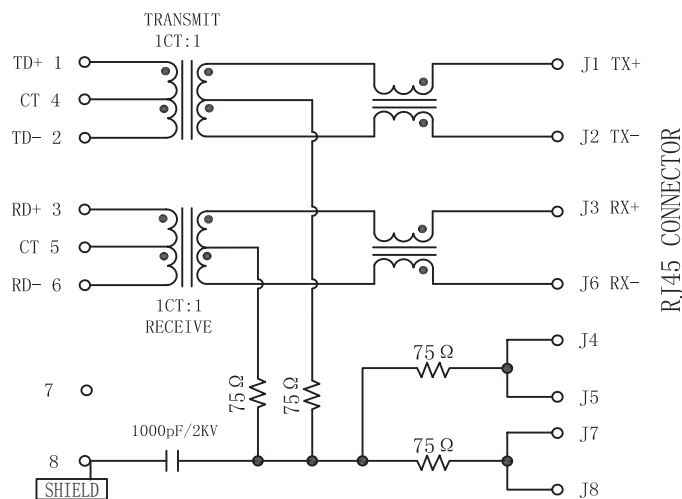

WisioE

深圳炜世科技有限公司

UNIT :mm
.xx+/-0.25, .xxx+/-0.13

10/100BASE
1X1 Tab-Down RJ45

深圳炜世科技有限公司
0755-86568556

Part NO:FC1805WSI

www.wisioe.com

REV.
D

SHEET 1 OF 1